



DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, SUITE 150
TURLOCK, CA 95380

PHONE: (209) 668-5520
FAX: (209) 668-5563
TDD: (800) 735-2929
engineering@turlock.ca.us

Date: 12/10/2019

City Project No.: 14-30

Addendum No.: 2

Plan holders:

The following changes and notations shall be made to the project plans and specifications:

Project Clarifications:

1. The City does not have a staging area for this project. Contractor will be required to obtain a staging area for the project.
2. Air Testing will not be required for this project. The City will perform CCTV testing on the live sewer. Bypass pumping will only be required if necessary to install the improvements.
3. The City will allow the Contractor to use the HMA grindings in place of AB. The recycled HMA must confirm to the gradation of AB requirements. The City will inspect the mix and reject any mix that is not in compliance.

Project Plans:

4. Sheet 5

Remove and replace sheet 5 with the attached sheet. The demo limit has been adjusted to the edge of public right-of-way. The existing edge of pavement on Castor Road is the right of way limit. Contractor will be responsible for any encroachment permits if required to install the improvements. The City will allow full day closures of Castor Road to install the improvements. Contractor shall open the road at the end of each day for public use.

5. Sheet 8

New pipe material is 8" SDR-26 on bid item 9.

6. Sheet 9 and Sheet 10

The existing 16-inch pipe material is assumed to be clay. Remove and replace sheet 9 with the attached sheet. New pipe material is 18" SDR-26 on bid item 11.

7. Sheet 11

The new pipe material is 8" C900, Class 200 DR 14 on bid item 10. The attached bid form adjusts the quantity.

8. Sheet 12

Remove and replace sheet 12 with the attached sheet.

Project Specifications:

9. Front Page, Page 4, and Bidder's Form

Please remove and replace the existing pages with the attached pages.

10. Section 10.09

Remove and replace the following section:

“10.09 SANITARY SEWER MANHOLE:

Contractor shall install the sanitary sewer manhole in accordance with the project plans and the Standard Specifications and Drawings.

Before submission of the submittal, the Contractor shall pothole the proposed sanitary sewer alignment for any underground conflicts.

QUANTITIES

Quantities of sanitary sewer manhole to be paid for by the each and shall be calculated on the basis of the dimensions shown on the plans, in the horizontal plane, and adjusted by the amount of change order by the Engineer.

PAYMENT

The contract price paid per each for Sanitary Sewer Manhole shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in constructing the Sanitary Sewer Manhole, complete in place, as shown on the plans, and as required by law, as specified in the Standard Specifications and these Special Provisions, and as directed by the Engineer.”

If you have any questions, please call me at (209) 668-6021 or email at RJones@turlock.ca.us.

Sincerely,

A handwritten signature in black ink, appearing to read "Randall E. Jones". The signature is fluid and cursive, with the first name "Randall" being more legible than the last name "Jones".

Randall Jones
Assistant Engineer



**NOTICE TO CONTRACTORS,
PROPOSAL,
AGREEMENT, &
SPECIAL PROVISIONS**

FOR CONSTRUCTION ON
Project No: 14-30
Sewer Line Replacement on Angelus Street, Bothun Road, and Castor Street

IN STANISLAUS COUNTY,
TURLOCK, CALIFORNIA.

Development Services Department/ Engineering Division

Phone: (209) 668-5599 ext 4421
Contact Person: Randall Jones

Nathan Bray, PE
Interim Development Services Director / City Engineer

Proposals shall be delivered to Turlock, California
at or before 2:00 PM on Tuesday, December 17, 2019
at the office of the City Engineer,
Development Services: Engineering Division
156 S. Broadway, Suite 150
Turlock, CA 95380



CITY OF TURLOCK, CALIFORNIA

NOTICE TO CONTRACTORS

Sealed proposals will be received by the City Engineer of the City of Turlock, Development Services/Engineering Division, 156 S. Broadway, Suite 150, Turlock, California 95380, until 2:00 PM on Tuesday, December 17, 2019, for:

City Project No. 14-30

Sewer Line Replacement on Angelus Street, Bothun Road, and Castor Street

In accordance with and as described and provided in the plans, specifications and the proposed form of contract therefore, all of which are on file in the office of the City Engineer, and to which special reference is hereby made.

No verbal, telegraphic, electronic mail, facsimile, or telephone Proposals shall be considered.

Proposals are required to be complete and for the entire work, materials and improvements unless the contrary is indicated in the specifications.

In accordance with the provisions of California Business and professions Code, Section 7028, Contractor shall possess one of the following Contractor license(s) at the time of bid and for the duration of the contract:

1. A-General Engineering Contractor

Failure to possess the specified license(s) shall render the Bid as non-responsive, shall act as a bar to award of the contract to any Bidder not possessing said license(s) at the time of Bid opening and shall result in the forfeiture of the security of said Bidder. Furthermore, any Bidder or Contractor not so licensed shall be subject to all legal penalties imposed by law, including, but not limited to, any appropriate disciplinary action by the Contractor's License Board.

Each proposal must be accompanied by cash, cashier's check, or check certified by a responsible bank, or by a bid bond, the proposed form of which is on file in the office of the City Engineer of said City and to which special reference is hereby made in a sum not less than ten percent (10%) of the total amount bid, payable to the City of Turlock as liquidated damages in the case the bidder is awarded the contract and fails within ten (10) days after the date of mailing to him by the City Engineer of a notice of award of the contract and that the contract is ready for signature to execute the above-mentioned written contract and file with the City Engineer satisfactory insurance certificates as required by the terms of said contract and satisfactory bonds as required by law for the faithful performance of said contract and for the protection of material, men and laborers. Special reference is hereby made to Sections 5100, et. seq., of the Public Contracts Code of the State of California and to the proposed forms for said bonds now on file in the office of the said City Engineer for further particulars regarding bonds.

BIDDER'S FORM

PROJECT TITLE: Sewer Line Replacement on Angelus Street, Bothun Road, and Castor Street

PROJECT NUMBER: 14-30

OPENING DATE: Tuesday, December 17, 2019

OPENING TIME: 2:00 PM

Item No.	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Total
1	Mobilization and Demobilization	LS	1		
2	Remove Existing Facilities	LS	1		
3	Earthwork and Grading	LS	1		
4	Temporary Traffic Control	LS	1		
5	ESCP	LS	1		
6	Potholing Existing Utilities	LS	1		
7	Shoring	LS	1		
8	Sanitary Sewer Lateral (4" SDR-26 and Cleanout)	EA	14		
9	Sanitary Sewer Pipe (8" SDR-26)	LF	589		
10	Sanitary Sewer Pipe (8" C900 Class 200)	LF	553		
11	Sanitary Sewer Pipe (18" SDR-26)	LF	686		
12	Sanitary Sewer Manhole (48")	EA	14		
13	Minor Concrete (Curb and Gutter)	LF	59		
14	Minor Concrete (Flatwork/ Driveway)	SF	125		
15	Concrete Collars	EA	3		
16	Aggregate Base (1/2" Class 2)	CY	155		
17	Hot Mix Asphalt (3/4" Type A, PG 64-10)	TON	104		
18	Hot Mix Asphalt (1/2" Type A, PG 64-10)	TON	427		
19	Pavement Grinding (Cold Plane Method)	SY	2,875		
20	Adjust Water Valve Cover to Grade	EA	2		
21	Adjust Manhole Cover to Grade	EA	12		
22	Pavement Striping (Detail 22)	LF	1,141		
23	Thermoplastic Pavement Striping (Detail 27B)	LF	556		
24	Thermoplastic Pavement Striping (12" White)	LF	136		
25	Thermoplastic Pavement Markings	SF	22		
Subtotal					

Bidder has examined and carefully studied the Bidding documents and other related data identified in the Bidding Documents and the following Addenda, receipt of which is hereby acknowledged


ADDENDA

No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____




TOTAL BID WRITTEN IN FIGURES: \$ _____, _____, _____ . _____

TOTAL BID WRITTEN IN WORDS: _____

CONTRACTOR: _____

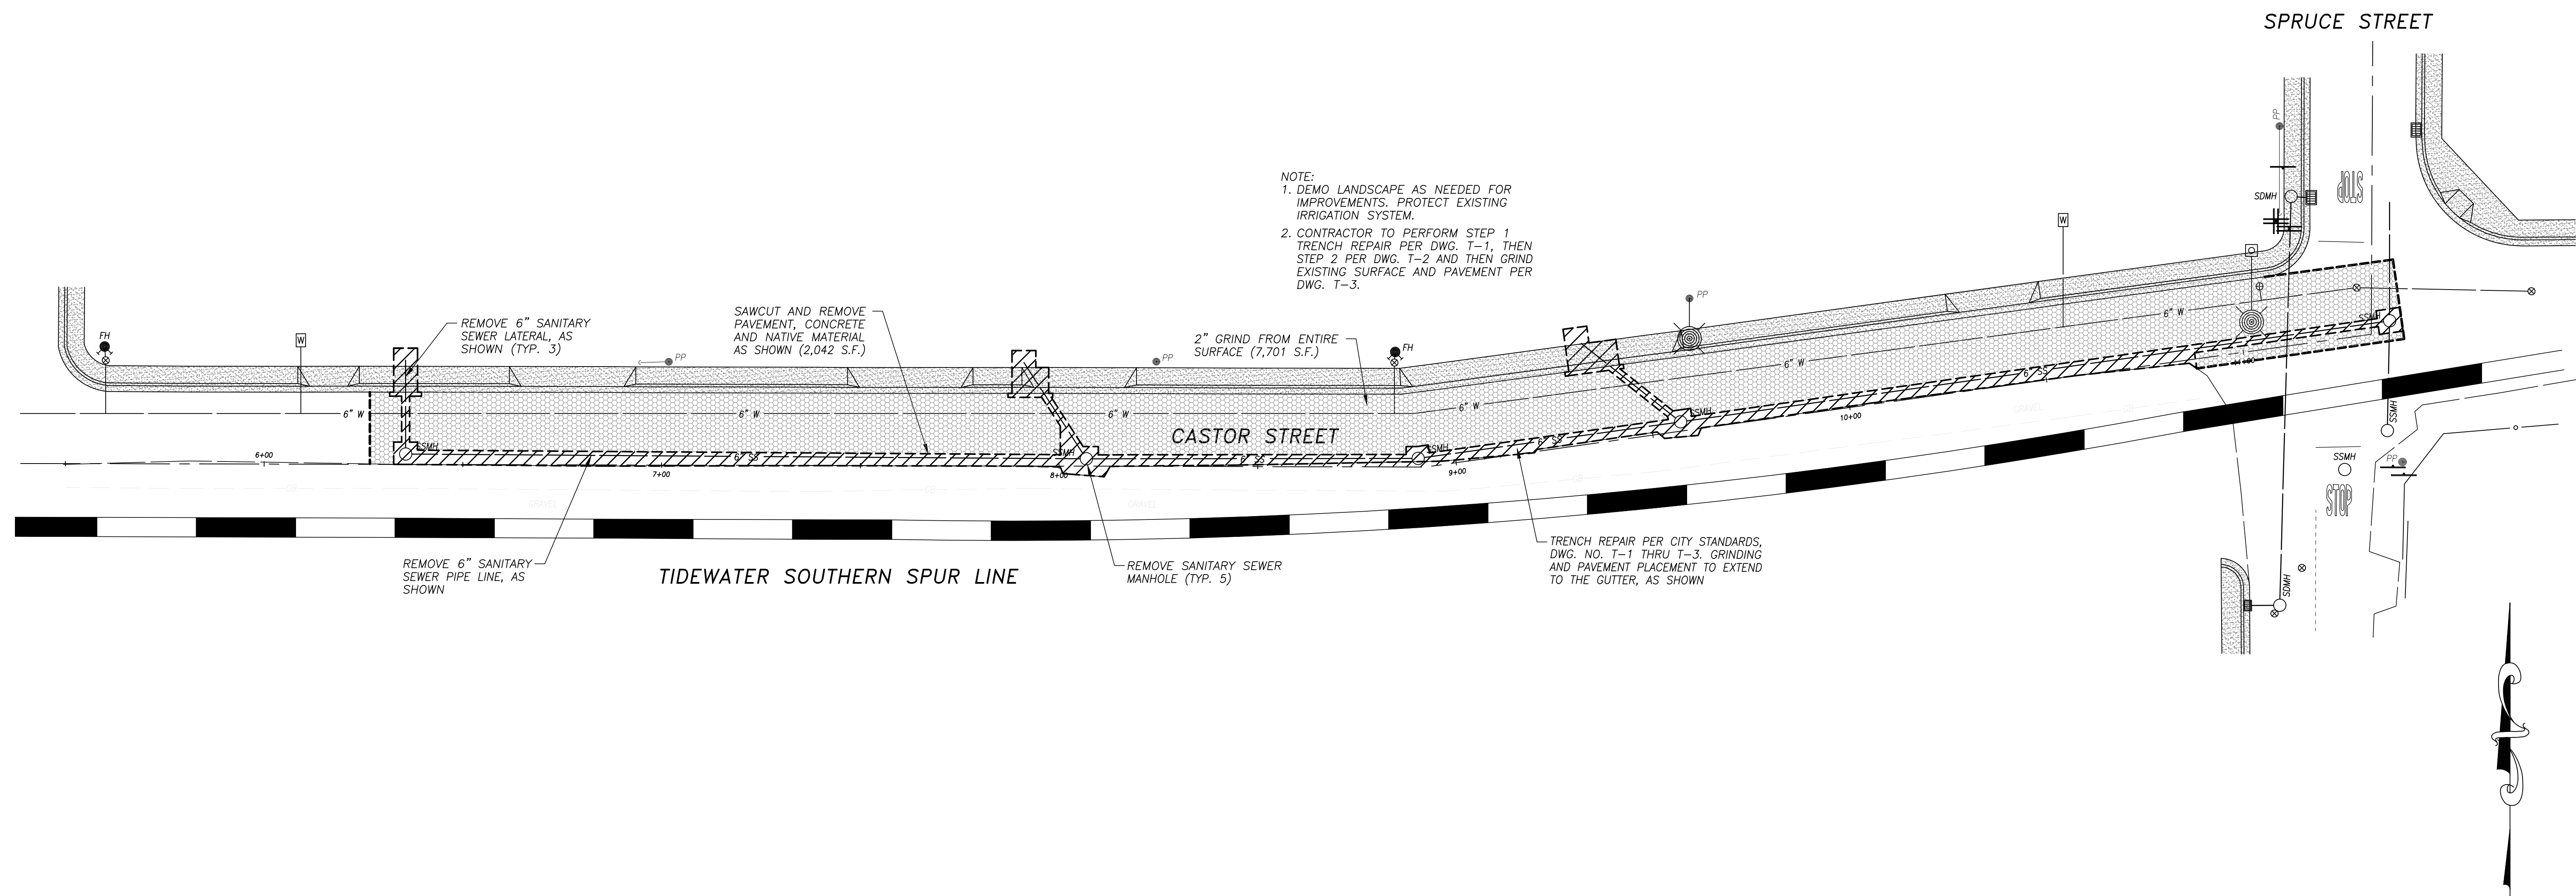

INSTALL SANITARY SEWER
LATERAL AND CLEANOUT
PER CITY STANDARDS DWG.
S-7 (TYP.~12)

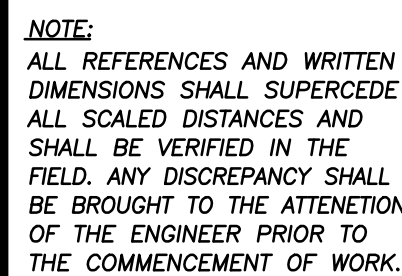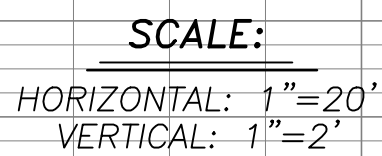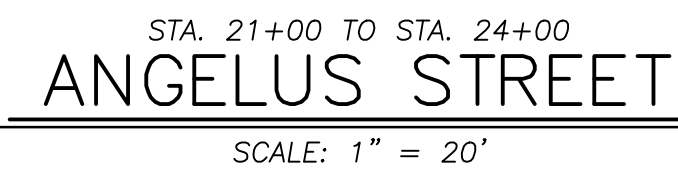


VERIFY SCALE
BAR IS 1" ON
ORIGINAL DRAWING

0 $\frac{1}{4}$ " $\frac{3}{4}$ " 1"
 $\frac{1}{2}$ "

IF NOT ONE INCH ON
THIS SHEET, ADJUST
SCALES ACCORDINGLY

SHEET
9
OF 16

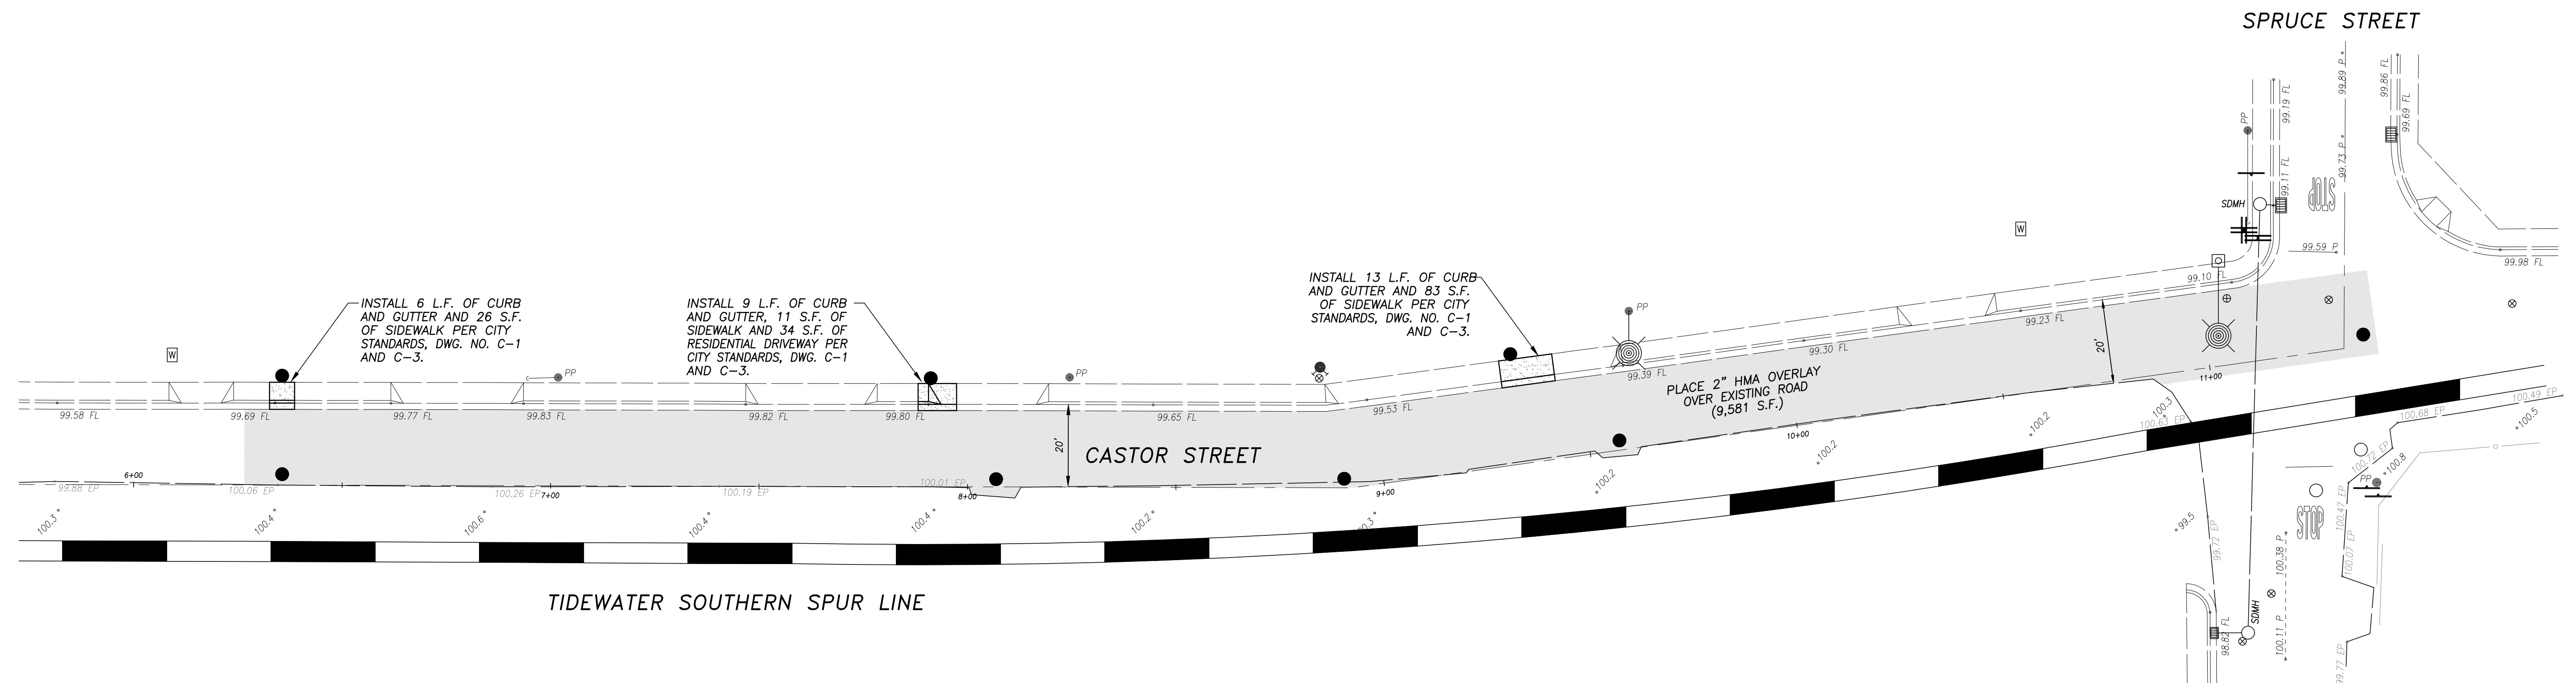

NOTES:

- HMA SHALL BE PG 1/2" TYPE A 64-10
- ENTIRE THICKNESS OF DEEP LIFT AREAS SHALL BE PLACED PRIOR TO FINAL HMA OVERLAY
- PLACE TEMPORARY STRIPING AFTER PAVING OPERATIONS, CONSISTING OF STOP BARS, LANE LINES, CENTERLINES AND CROSSWALKS CONFORMING TO THE STRIPING PLANS
- FINAL STRIPING SHALL BE PLACED SEVEN (7) CALENDAR DAYS AFTER LAST PAVING DAY
- RAISE ALL FRAMES AND COVERS TO FINISH GRADE. USE PG 64-10 HMA FOR PAVING AROUND FRAMES
- DEEP LIFT HMA SHALL CONSIST OF 6" HMA OVER NATIVE, COMPACTED TO 95% R.C.
- FINAL PAVEOUT WITH 2" HMA OVER ENTIRE SURFACE

STRIPING NOTES:

- CONTRACTOR SHALL REPLACE ALL REGULATORY AND WARNING SIGNS WITH HIGH INTENSITY PRISMATIC GRADE SIGNS. ALL SIGNS SHALL BE EITHER THE SAME DIMENSION OR THE SMALLEST LEGAL SIZE, WHICHEVER IS LARGER. USE EXISTING POST IF APPLICABLE.
- ALL PAVEMENT MARKINGS AND STRIPES SHALL BE THERMOPLASTIC.
- PAVEMENT MARKERS SHALL BE PLASTIC. CERAMIC PAVEMENT MARKERS WILL NOT BE ALLOWED.